

## Pallet Truck Specification


Optional ExStandard Pallet Truck (15 combinations) 2500KG capacity					
Fork Length A	940 (37")	1010 (40")	1060 (42")	1140 (45")	1215 (48")
Fork Width B	470 (18.5")		521 (20.5")		686 (27")

Options
<ul style="list-style-type: none"> <li><b>Capacities</b> 3000KG with strengthened frame &amp; slow lowering valve</li> </ul>
<ul style="list-style-type: none"> <li><b>Wheel Options</b>            Polyurethane – harder wearing, longer life            Rubber steer wheels – for smooth, quick operation and maximum floor protection            Steel – ideal for foundries or swarf littered floors            Tandem load wheels – for easy pallet entry or uneven surfaces            Rubber sided bearings for damp environments</li> </ul>
<ul style="list-style-type: none"> <li><b>Special Widths &amp; Lengths (May reduce capacity)</b>            Widths: Minimum 343 to maximum 1143            Lengths: Minimum 660 to maximum 2020</li> </ul>
<ul style="list-style-type: none"> <li><b>Frames</b>            Galvanised frame for extra protection with powder coated pump unit            Hinged or fixed stillage frame</li> </ul>
<ul style="list-style-type: none"> <li><b>Brake Systems</b>            Parking Brake            Dead Man Brake:           <ul style="list-style-type: none"> <li>Operates as dead man brake &amp; parking brake, &amp; to slow the truck on ramps</li> <li>Ideal for use on tail lifts</li> <li>Twin automotive brake operates on steer wheels</li> <li>Brakes fitted with separate adjusters</li> <li>Articulating axle keeps both braked wheel in contact with the floor</li> </ul> </li> </ul>
<ul style="list-style-type: none"> <li><b>Pump Unit Options</b>            Cold Store protection (For temperatures as low as -30 degrees)            Overload valve            Slow lowering valve</li> </ul>

Low Profile Pallet Truck (Raised height 184, 63 closed height) 1500KG capacity, fitted with nylon steer wheels and single steel load rollers			
FORK LENGTH A	940 (37")	1060 (42")	1215 (48")
FORK WIDTH B	470 (18.5")		686 (27")

Paper Reel Truck - Fitted with nylon steer wheels and single nylon load rollers 1500KG capacity, standard fork length 1150 (45")				
Type	Maximum Reel Size	Minimum Reel Size	Dimension Over Fingers	Dimension Inside Fingers
RT945-1500-NSN	940 (37")	500 (20")	810 (32")	374 (14.75")
RT1245-1500-NSN	1240 (48.5")	600 (24")	896 (35.5")	460 (18")
RT1545-1500-NSN	1510 (59.5")	750 (29.5")	964 (38")	528 (20.75")

All dimensions are in mm unless otherwise shown

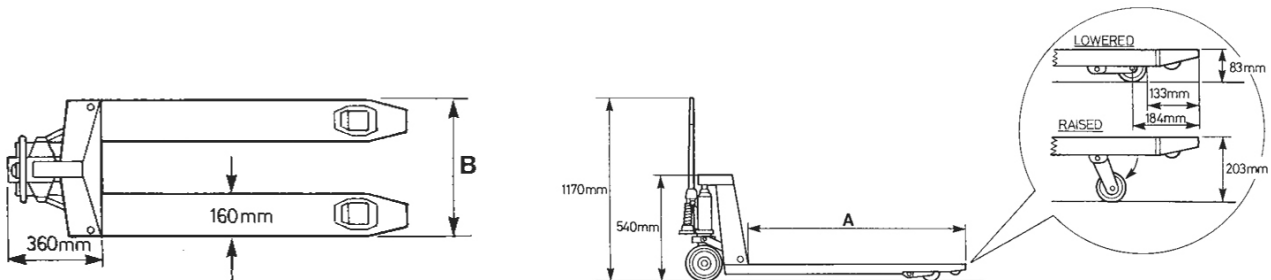

This document was downloaded from – [www.manualhandlingsolutions.com](http://www.manualhandlingsolutions.com)