


The EZ Loader's automatic self-levelling operation with integral rotator ring provides the ultimate in ergonomics while helping to increase worker productivity.



## DESIGN FEATURES & BENEFITS

- **Self-levelling** design automatically keeps the top of the load at a convenient working height to help eliminate bending and improve productivity
- Integral rotator ring helps **eliminate reaching and stretching**
- **Captive air operation** eliminates cumbersome mechanical springs and gives more controlled (dampened) movement to the platform
- **Infinitely adjustable** for varied loads by simply adding or bleeding air - no changing of springs required
- Pressure gauge and air valves are protected, yet located for **easy access**. The custom air gauge indicates pressure in imperial and metric scales
- Secured ball-bearing centre pivot of the 430 diameter rotator ring provides **smooth, even rotation**
- **Pressure relief valve** prevents excess pressure build-up
- **Heavy duty structural steel construction** to handle tough industrial environments
- Surfaces are phosphatised and powder coated with a high quality polyester for a **lasting, durable finish**
- **Rollers are entrapped** in the base frame and platform, for added stability
- **Safety finger guards** under the rotator ring are standard on all EZ Loaders
- **EZ Loaders arrive at your premises fully assembled** - just add air!
- **Easily transported** with a fork truck or optional portability packages

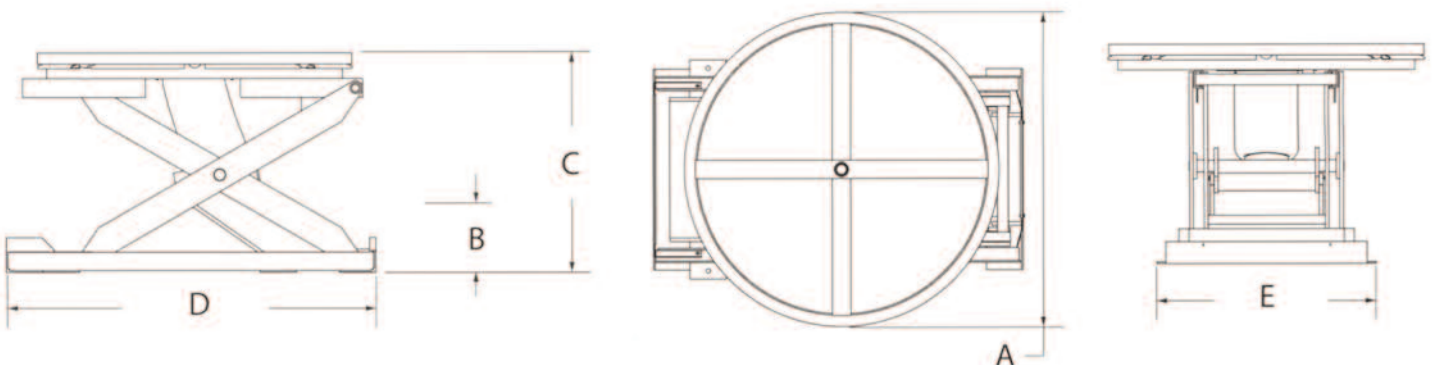

## SELECTOR TABLE FOR EZ-1 SERIES

Model	Travel	Capacity		Platform Height		Rotator ring Diameter (A)	Base Frame		Ship weight
		Minimum	Maximum	Lowered (B)	Raised (C)		Length (D)	Width (E)	
EZ-30	539mm	204kg	1350kg	223mm	762mm	1092mm	1283mm	762mm	227kg
EZ-45	539mm	500kg	2000kg	223mm	762mm	1092mm	1283mm	762mm	239kg